

LED POST TOP LUMINAIRE




Code
INGE3040

5 YEARS
GUARANTEE



Application

- Suitable for park, square and side road lighting

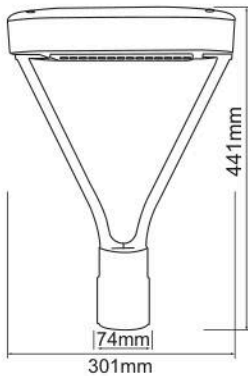

Technical Data

Housing Material	Die-casting Aluminum
Optic Material	Polycarbonate (UV Resistant)
Color	Grey (RAL7016)
Input Voltage	100-240V AC
Input Frequency	50~60Hz
Total Wattage	30W
LED Type	SMD(LM80)
Lifespan	50.000 hours
Protection Class	CLASS I
Ingress Protection	IP66
Mechanical Impact Degree	IK08
Surge Protection	4-6kV
Function Temperature	-60°~+60°C
LED Driver	Yes (Built-in)
Dimming	Yes
Replaceable LED / Driver	Yes / No

Photometrical Data

Color Temperature	4000K
Lumen	4200Lm
LED Luminous Efficacy (Lm/W)	140Lm/W
Light Beam Spread	120°
Color Rendering Index (Ra)	≥70

Energy Data

Energy Efficiency Label **D**

The technical data of the product may differ from the listed +/- 10%



APOSTOLIDIS TRADING
Industrial area of Serres | 62100 Serres, Greece
T. +30 23210 77020-21 | F. +30 23210 77022
info@acalight.gr | www.acalight.gr

