

LED ROUND WALL LUMINAIRE

Code:
MADA1240


2 YEARS
GUARANTEE



UV protection

Application

This luminaire is suitable for outdoor installation.

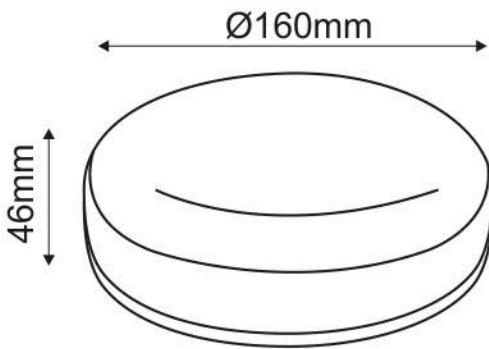

Technical Data

Housing Material	Polycarbonate
Optic Material	Opal Polycarbonate
Color	White
Input Voltage	230V AC
Input Frequency	50~60Hz
Total Wattage	12W
LED Type	SMD
Lifespan	30.000 hours
Protection Class	CLASS II
Ingress Protection	IP66
Mechanical Impact Degree	IK08
LED Driver	Yes (Built in)
Dimming	No
Replaceable LED / Driver	No / No

Photometrical Data

Color Temperature	4000K
Lumen	1070Lm
Light Beam Spread	120°
Color Rendering Index (Ra)	≥80

Energy Data

Energy Efficiency Label	F
Energy Consumption	12.0 kWh/1000h

The technical data of the product may differ from the listed +/- 10%



APOSTOLIDIS TRADING
Industrial area of Serres | 62100 Serres, Greece
T. +30 23210 77020-21 | F. +30 23210 77022
info@acalight.gr | www.acalight.gr

