

LED SMD LINEAR LUMINAIRE


Code:
TETE3040

2 YEARS
GUARANTEE



Application

- This luminaire is suitable for outdoor installation

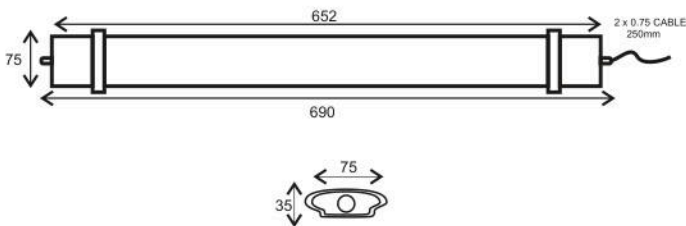

Technical Data

Housing Material	Polycarbonate
Optic Material	Opal Polycarbonate
Color	White
Input Voltage	230V AC
Input Frequency	50~60Hz
Total Wattage	30W
LED Type	SMD (LM80)
Lifespan	30.000 hours
Protection Class	CLASS II 
Ingress Protection	IP66
Mechanical Impact Degree	IK08
LED Driver	Yes (Built in)
Dimming	No
Replaceable LED / Driver	No / No
Power Cable	2*0.75mm ² (250mm)

Photometrical Data

Color Temperature	4000K
Lumen	2750Lm
Light Beam Spread	120° Symmetric
Color Rendering Index (Ra)	80

Energy Data

Energy Efficiency Label	E
Energy Consumption	30.0 kWh/1000h

The technical data of the product may differ from the listed +/- 10%



APOSTOLIDIS TRADING
Industrial area of Serres | 62100 Serres, Greece
T. +30 23210 77020-21 | F. +30 23210 77022
info@acalight.gr | www.acalight.gr

